





● 衬氟法兰球阀
Q41F46-10/16Q/C/P/RL

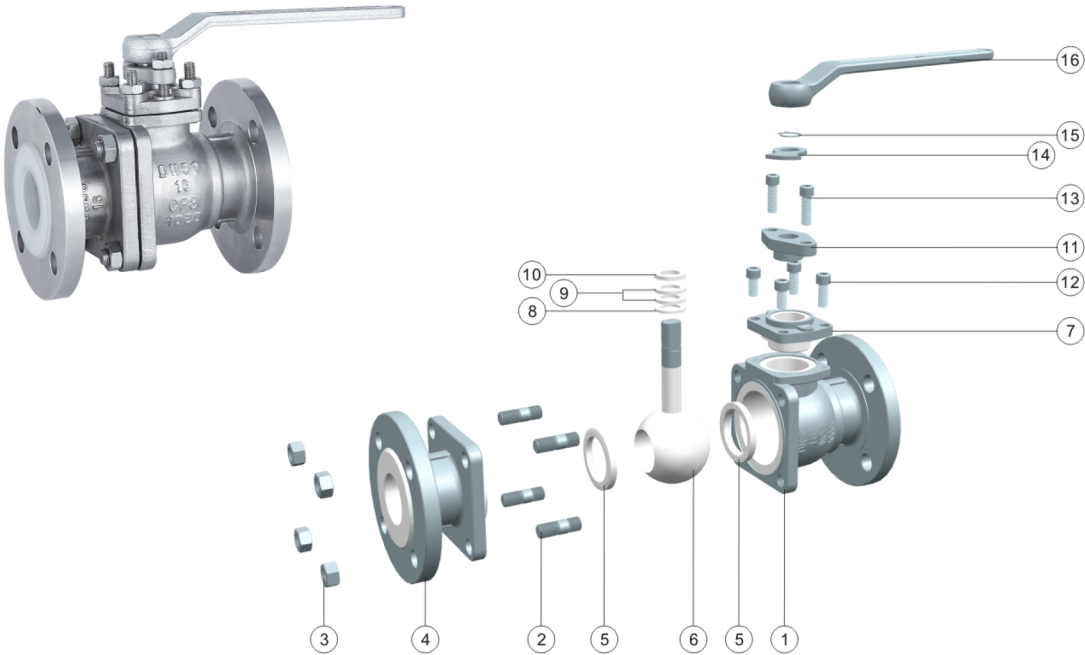

永园阀门	应用规范
●	两片式结构、全通径设计
●	产品设计按GB/T15185、GB/T12237和HG/T3704标准
●	结构长度按HG/T3704标准
●	法兰连接按HG/T20592、GB/T17241.6标准
●	压力试验按GB/T26480、GB/T13927标准
●	压力温度额定值按GB/T17241.7和GB/T15185标准

永园阀门	性能规范	
●	公称压力	PN10 PN16
●	壳体强度试验（水）	1.5Mpa 2.4Mpa
●	密封试验（水）	1.1Mpa 1.8Mpa
●	密封试验（气）	0.6Mpa
●	适用温度	-29℃ ~ 150℃
●	适用介质	水、蒸气、油品/一般腐蚀性介质

永园阀门	零件	材料			
● 1	阀体	QT450+FEP	WCB+FEP	CF8+FEP	CF3M+FEP
● 2	双头螺栓	35#	35#	S30408	S31603
● 3	螺母	QT235-A	QT235-A	S30408	S31603
● 4	阀盖	QT450+FEP	WCB+FEP	CF8+FEP	CF3M+FEP
● 5	阀座	PTFE	PTFE	PTFE	PTFE
● 6	球体	WCB+FEP	WCB+FEP	CF8+FEP	CF3M+FEP
● 7	上盖	QT450+FEP	WCB+FEP	CF8+FEP	CF3M+FEP
● 8	下填料	PTFE	PTFE	PTFE	PTFE
● 9	中填料	PTFE	PTFE	PTFE	PTFE
● 10	上填料	PTFE	PTFE	PTFE	PTFE
● 11	填料压盖	QT450	WCB	CF8	CF3M
● 12	内六角螺钉	35#	35#	S30408	S30408
● 13	内六角螺钉	35#	35#	S30408	S30408
● 14	定位块	Q235-A	Q235-A	S30408	S30408
● 15	弹性挡圈	65Mn	65Mn	S30408	S30408
● 16	手柄	QT400-18	QT400-18	QT400-18	QT400-18

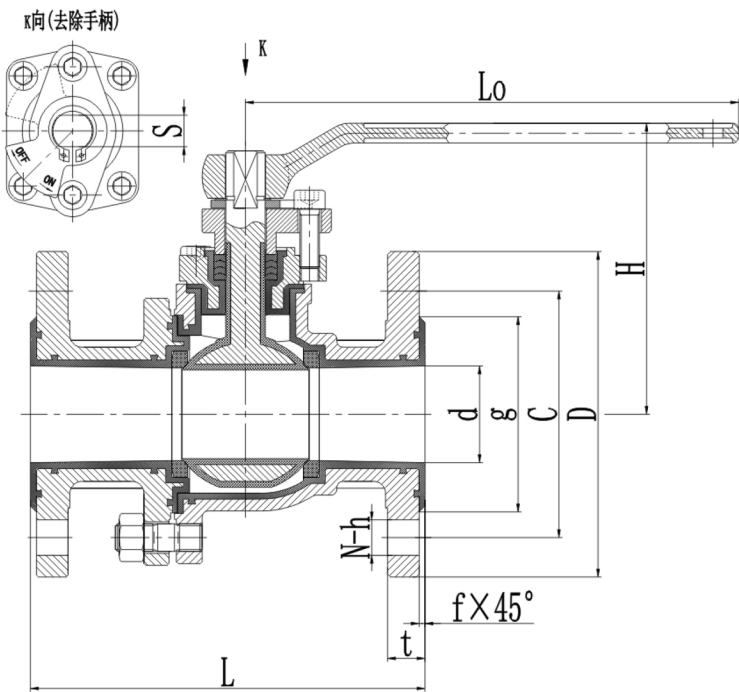

永园阀门	(铁制)外形尺寸 (mm)										
DN	L	D	C	g	d	N-h	t	f	S	H	L0
● 15	140	95	65	46	19	4-14	16.5	2.5	14x9	109	160
● 20	140	105	75	56	19	4-14	16.5	2.5	14x9	109	160
● 25	150	115	85	65	24	4-14	17	3	14x9	114	160
● 40	180	150	110	84	40	4-18	19	3	20x14	140	250
● 50	200	165	125	99	49	4-18	19	3	20x14	148	250
● 65	220	185	145	122	65	4-18	19.5	3	24x16	167	350
● 80	250	200	160	138	78	8-18	21.5	3.5	24x16	184	350
● 100	280	220	180	158	98	8-18	22	4	28x18	220	400
● 125	320	250	210	188	125	8-18	22	4	36x24	263	650
● 150	360	285	240	211	147	8-23	22	4	40x27	292	750

永园阀门	(钢制)外形尺寸 (mm)										
DN	L	D	C	g	d	N-h	t	f	S	H	L0
● 15	140	95	65	46	19	4-14	16.5	2.5	14x9	109	160
● 20	140	105	75	56	19	4-14	16.5	2.5	14x9	109	160
● 25	150	115	85	65	24	4-14	17	3	14x9	114	160
● 32	165	140	100	78	32	4-18	18.5	2.5	20x14	143	250
● 40	180	150	110	84	40	4-18	19	3	20x14	140	250
● 50	200	165	125	99	49	4-18	19	3	20x14	148	250
● 65	220	185	145	122	65	4-18	19.5	3	24x16	167	350
● 80	250	200	160	138	78	8-18	21.5	3.5	24x16	184	350
● 100	280	220	180	158	98	8-18	22	4	28x18	220	400
● 125	320	250	210	188	125	8-18	22	4	36x24	263	650
● 150	360	285	240	211	147	8-23	22	4	40x27	292	750